

THE DURAPIXEL® VISUAL WORLD



LITEMAX SLD & SLO1768

17" Sunlight Readable Smart Panel
Powered By Durapixel™ Technology

(1st Edition 2011/1/20)
All information is subject to change without notice.

Approved by	Checked by	Prepared by

LITEMAX Electronics Inc.
8F, No.137, Lane 235, Bau-chiau Rd.,
Shin-dian City, Taipei County, Taiwan R.O.C.
Tel : 886-2-8919-1858
Fax: 886-2-8919-1300
Homepage: <http://www.litemax.com.tw>

RECORD OF REVISION

Version and Date	Page	Old Description	New Description	Remark
Jan,20,2011	all		Preliminary Release	

Contents

RECORD OF REVISION	2
Contents	3
1.0 GENERAL DESCRIPTION	4
1.1 FEATURES	4
1.2 GENERAL SPECIFICATIONS	4
1.3 ABSOLUTE MAXIMUM RATINGS	5
2.0 Electrical characteristics	6
3.0 SIGNAL Characteristic	8
4.0 TIMING Characteristics	10
5.0 CONNECTOR and PIN ASSIGNMENT	13
6.0 OPTICAL SPECIFICATION	14
7.0 LED DRIVING BOARD SPECIFICATIONS	15
8.0 AD2662GDVAR SPECIFICATIONS	17
8.1 General Description.....	17
8.2 Outline Dimensions	18
8.3 AD2662 Board Pin Define	21
J3: Panel connector	21
CN3: DVI-D INPUT Connector	21
CN5: DVI-D Connector (16pin 2.0mm)	22
CN2: Analog RGB Input connector (D-SUB 15Pin).....	22
CN4: Analog RGB Input connector (13pin connector).....	22
JS1: Power DIN(12V).....	22
JS1: Power Jack (12V).....	22
J1: Power connector (12V) (6PIN 2.0mm)	23
J8: Power connector (5V/12v)(4PIN 2.0mm).....	23
J2: Inverter Connector(8PIN 2.0mm).....	23
J7, J9: FAN (2PIN 2.0mm)	23
J6: Key Pad (9PIN 2.0mm)	23
J10: Speaker Connector (4PIN 2.0mm)	23
J11 Extern Funtion Connector (11P X 2PIN 2.0mm)	24
J5: Ambient (3PIN 2.0mm)	24
J4: VR connector (3PIN 2.0mm).....	24
J12: IR Connector(3PIN 2.0mm).....	24
JP1: PANEL VCC (3PIN 2.54mm).....	24
8.4 I/O BOARD Pin Define	25
8.5 IR Receive Board Pin Define.....	26
8.6 DC Characteristics.	26
8.7 OSD menu	27
9.0 MECHANICAL DRAWING	32
10.0 PRECAUTIONS	34

1.0 GENERAL DESCRIPTION

SLD/SLO1768 is a smart panel design monitor which is wide color TFT-LCD module as active switching devices with 1,600nits LED backlight powered by Durapixel™ technology. This module has a 17 inch diagonally measured active area with SXGA resolutions (1280 horizontal by 1024 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors.

1.1 FEATURES

- Sunlight Readable
- LED Backlight
- SXGA(1280x1024) High Definition
- High Shock & Vibration Resistance
- Low Power Consumption
- High Uniformity
- Low EMI Noise
- Wide Dimming
- Life Expectancy
- Smart Panel design. The thickness is only 36mm

1.2 GENERAL SPECIFICATIONS


Model No.	SLD1768	SLO1768
Description	17" TFT LCD Display, LED Backlight, 1600nits, SXGA(1280x1024)	
Display Area (mm)	337.9(H) x 270.3 mm	
Brightness	1600 cd/m ²	
Resolution	1280x1024 (SXGA)	
Contrast Ratio	1000 : 1	
Pixel Pitch (mm)	0.264(H) x 0.264(V)	
Viewing Angle	+85°~ -85°(H), +80°~ -80°(V)	
Display Colors	16.7M	
Response Time (Typical)	5ms	
Power Consumption	32.5W	
Dimensions (mm)	358.5x297.3x36mm	389.7x297.3x36.2mm
Weight (Net)	2.3kg	

1.3 ABSOLUTE MAXIMUM RATINGS

ABSOLUTE RATINGS OF ENVIRONMENT

Item	Symbol	Min	Max	Unit	Conditions
Operating Humidity	HOP	5	90	[%RH]	Note
Storage Temperature	TST	-20	+60	[°C]	
Storage Humidity	HST	5	90	[%RH]	

Note: For quality performance, please refer to Incoming Inspection Standard.

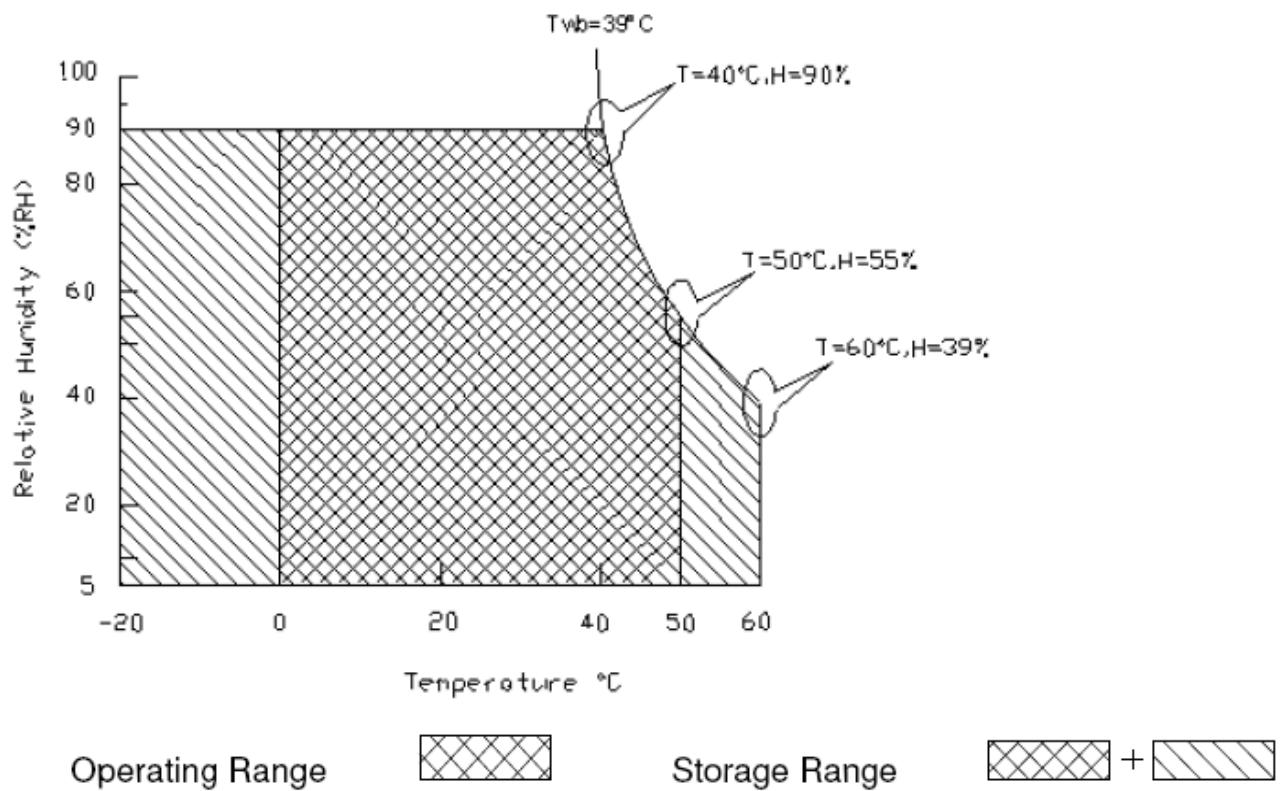



2.0 Electrical characteristics

TFT LCD Module Power Specification

Input power specifications are as following:

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
VCC	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	$\pm 10\%$
ICC	Input Current	-	1.05	1.16	[A]	Vin=5V , All Black Pattern, at 75Hz
IRush	Inrush Current	-	-	3.0	[A]	Note
PCC	VCCPower	-	5.25	5.8	[Watt]	Vin=5V , All Black Pattern, at 75Hz
VCCrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	200	[mV] p-p	With panel loading

Note: Measurement conditions:

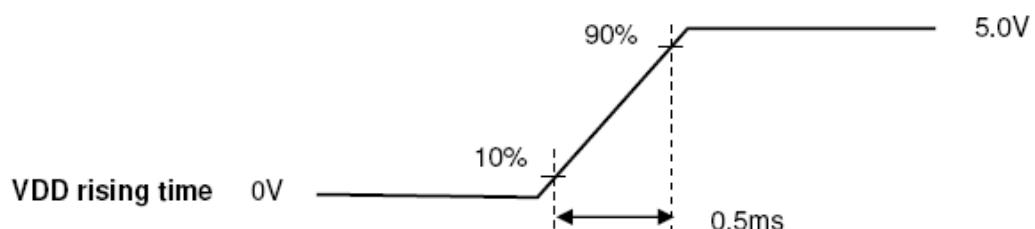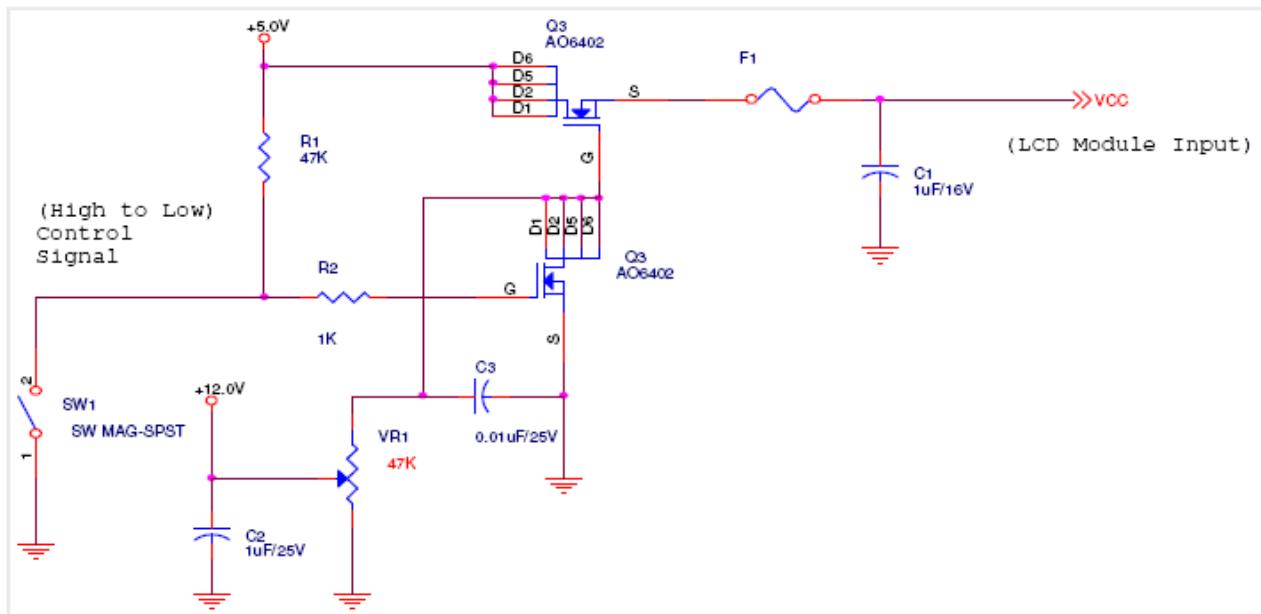


Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when Vin is off. It is recommended to refer the specifications of SN75LVDS82DGG (Texas Instruments) in detail. Each signal characteristics are as follows:


Symbol	Parameter	Min	Typ	Max	Units	Condition
VTH	Differential Input High Threshold	-	-	+100	[mV]	VICM = 1.2V <i>Note</i>
VTL	Differential Input Low Threshold	-100	-	-	[mV]	VICM = 1.2V <i>Note</i>
VID	Input Differential Voltage	100	400	600	[mV]	<i>Note</i>
VICM	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	VTH/VTL = ±100MV <i>Note</i>

Note: LVDS Signal Waveform

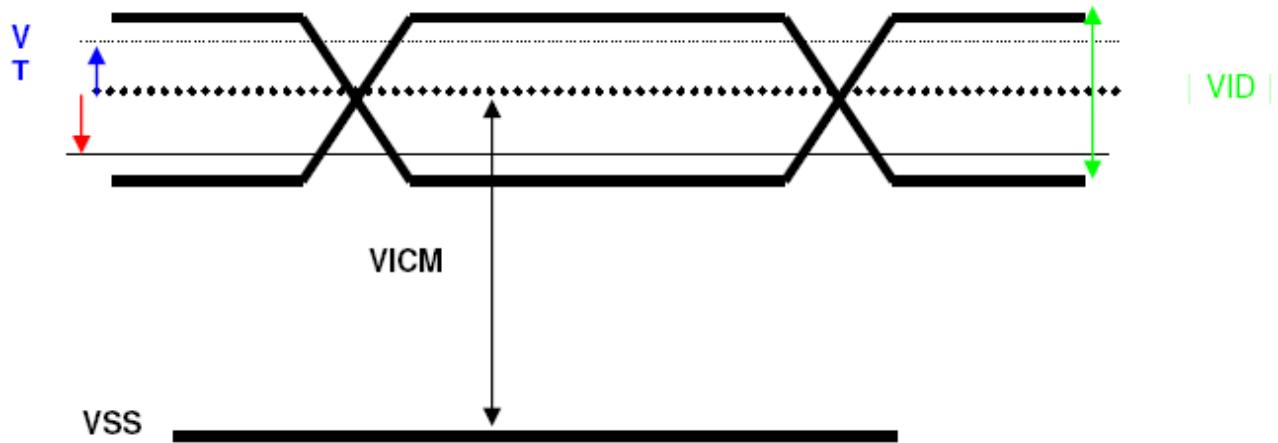


3.0 SIGNAL Characteristic

PIXEL FORMAT IMAGE

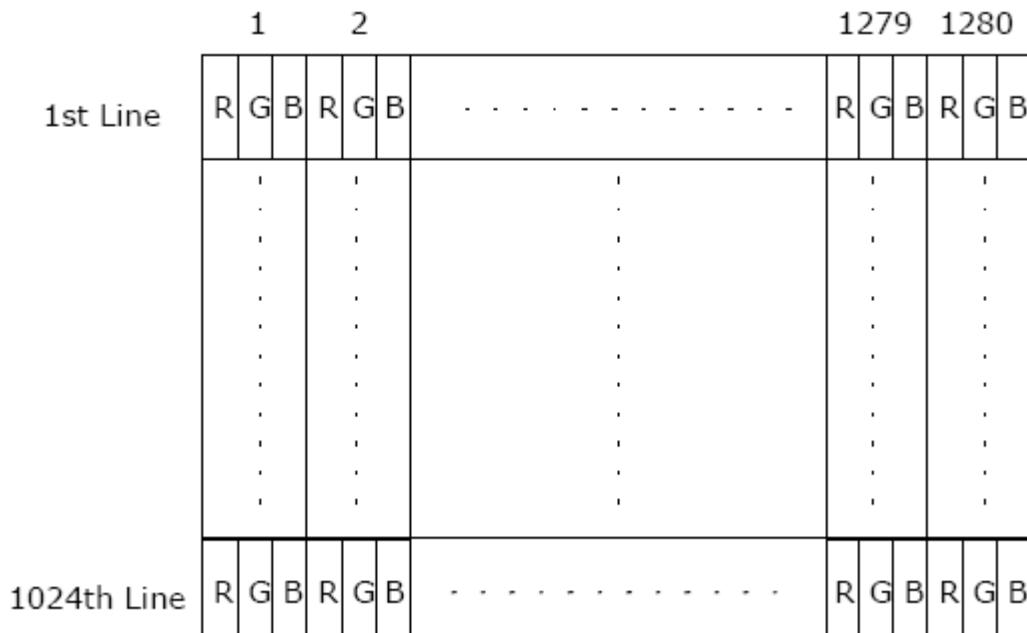

INPUT DATA FORMAT

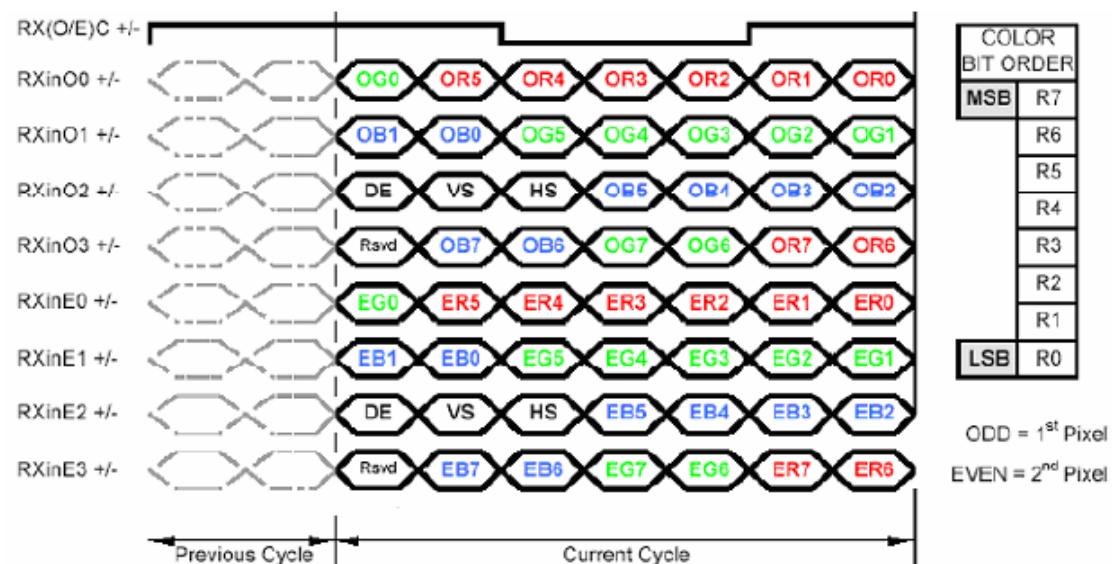

Note1: Normally, DE, VS, HS on EVEN channel are not used.

Note2: Please follow PSWG.

Note3: 8-bit in

Signal Description

The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

PIN #	SIGNAL NAME	DESCRIPTION
1	RxO0-	Negative LVDS differential data input (Odd data)
2	RxO0+	Positive LVDS differential data input (Odd data)
3	RxO1-	Negative LVDS differential data input (Odd data)
4	RxO1+	Positive LVDS differential data input (Odd data)
5	RxO2-	Negative LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
6	RxO2+	Positive LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
7	GND	Power Ground
8	RxOC-	Negative LVDS differential clock input (Odd clock)
9	RxOC+	Positive LVDS differential clock input (Odd clock)
10	RxO3-	Negative LVDS differential data input (Odd data)
11	RxO3+	Positive LVDS differential data input (Odd data)
12	RxE0-	Negative LVDS differential data input (Even data)
13	RxE0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RxE1-	Negative LVDS differential data input (Even data)
16	RxE1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RxE2-	Negative LVDS differential data input (Even data)
19	RxE2+	Positive LVDS differential data input (Even data)
20	RxEC-	Negative LVDS differential clock input (Even clock)
21	RxEC+	Positive LVDS differential clock input (Even clock)
22	RxE3-	Negative LVDS differential data input (Even data)
23	RxE3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	GND	Power Ground (For AUO test Aging+HVS mode)
26	NC	No contact
27	GND	Power Ground
28	VCC	+5.0V Power Supply
29	VCC	+5.0V Power Supply
30	VCC	+5.0V Power Supply


4.0 TIMING Characteristics

Basically, interface timing described here is not actual input timing of LCD module but close to output timing of SN75LVDS82DGG (Texas Instruments) or equivalent.

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	T _v	1034	1066	2048	Th
	Active	T _{disp(v)}	1024	1024	1024	Th
	Blanking	T _{bpl(v)} +T _{fpl(v)} +P _{Wvs}	10	42	1024	Th
Horizontal Section	Period	T _h	750	844	2048	T _{clk}
	Active	T _{disp(h)}	640	640	640	T _{clk}
	Blanking	T _{bpl(h)} +T _{fpl(h)} +P _{Whs}	110	204	1408	T _{clk}
Clock	Period	T _{clk}	14.81	18.52	25	ns
	Frequency	Freq	40	54	70	MHz
Frame rate	Frame rate	F	49	60	76	Hz


DE mode only

Timing diagram

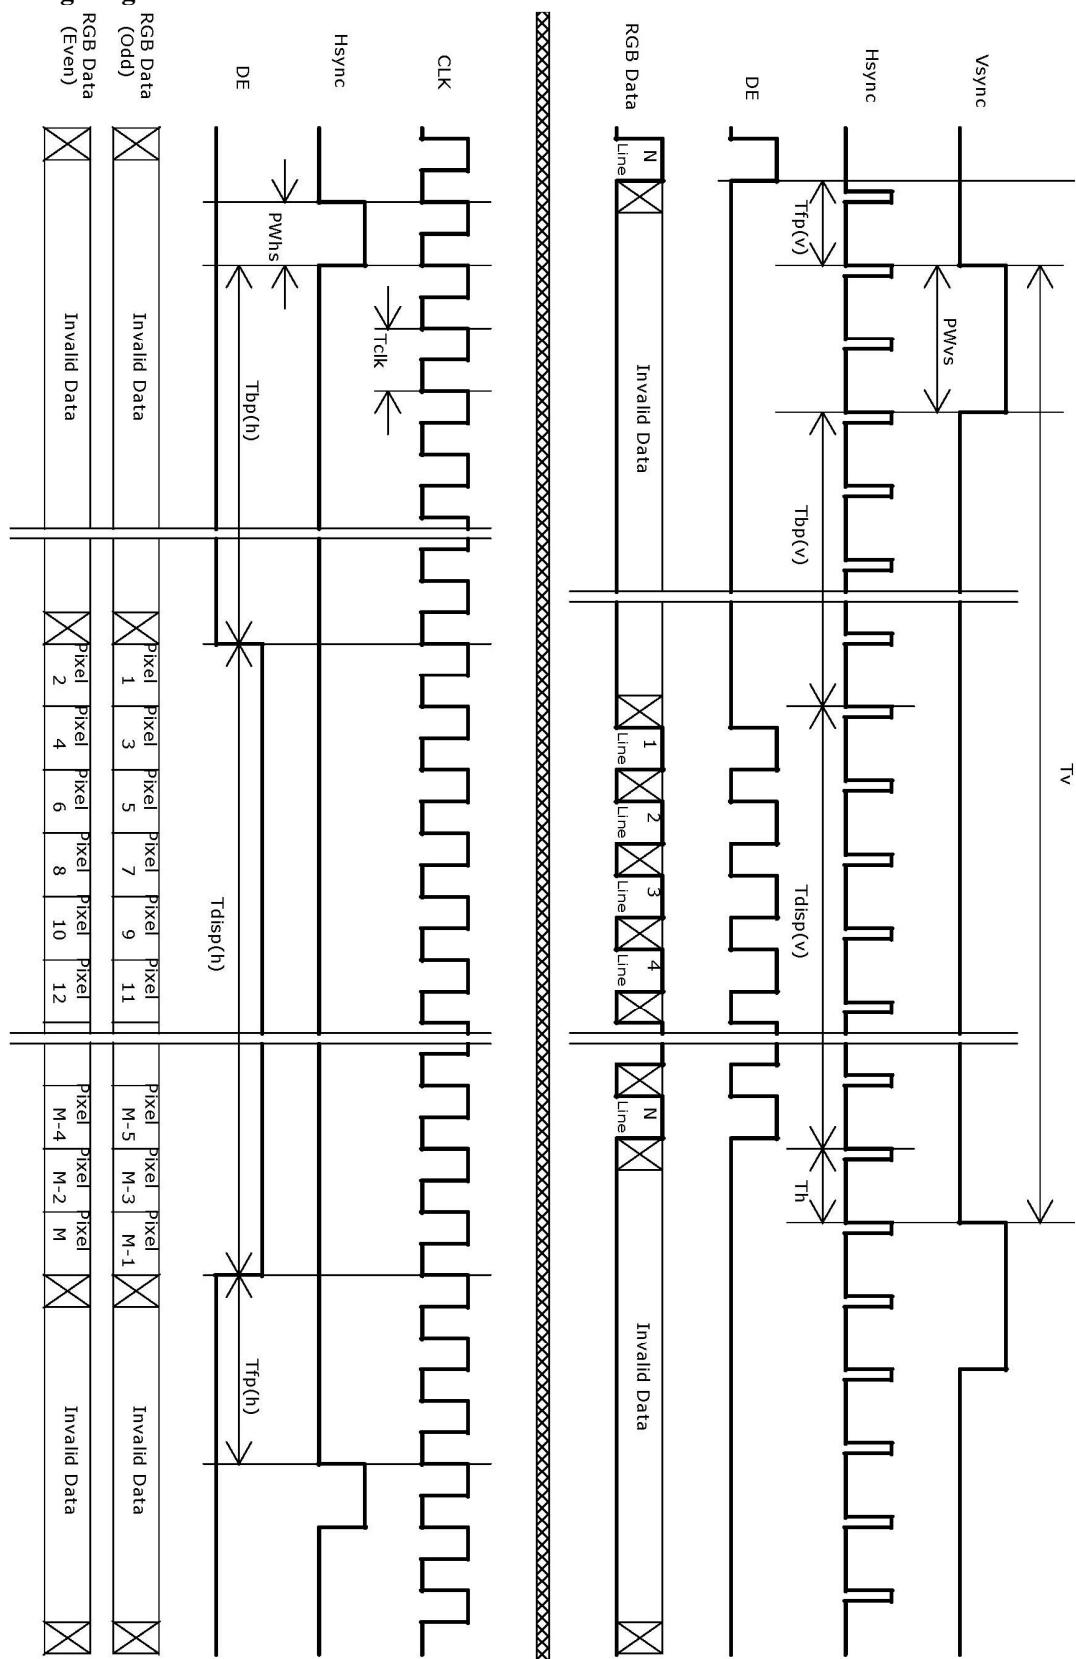

Power ON/OFF Sequence

VDD power and lamp on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

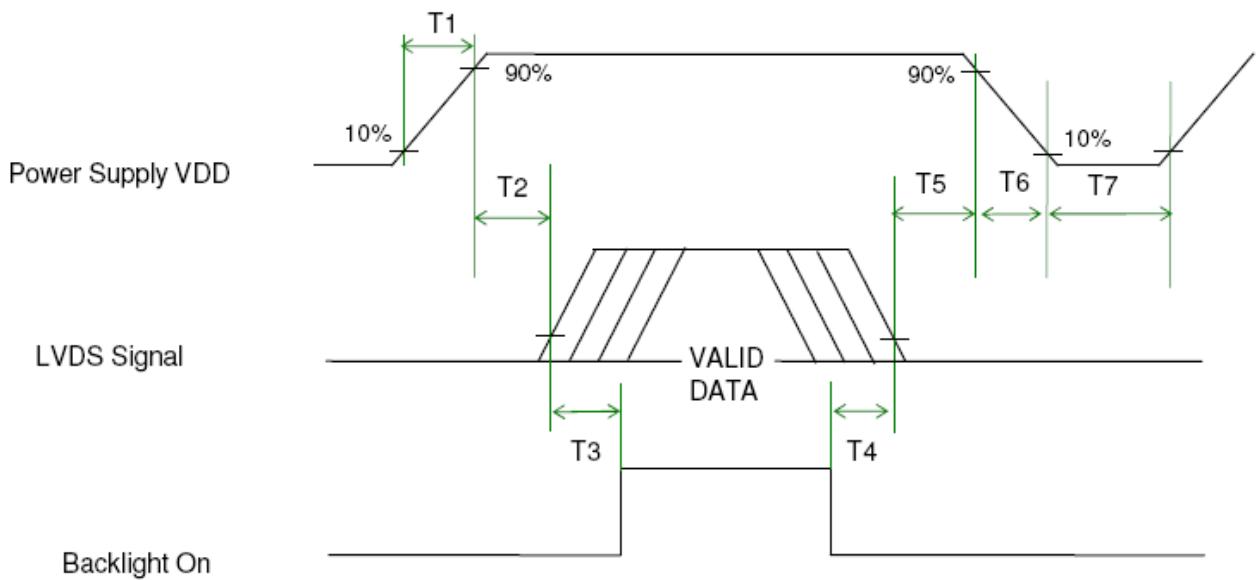

Power Sequence Timing

Parameter	Value			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	-	50	[ms]
T3	300	-	-	[ms]
T4	100	-	-	[ms]
T5	0	16	50	[ms]
T6	-	-	-	[ms]
T7	1000	-	-	[ms]

Note: The values of the table are follow PSWG.

5.0 CONNECTOR and PIN ASSIGNMENT

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

TFT LCD Module

Connector Name / Designation	Interface Connector
Manufacturer	JAE or Compatible
Type Part Number	FI-XB30SSL-HF15 or Compatible
Mating Housing Part Number	JAE FI-X30HL or Compatible

PIN ASSIGNMENT

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	GND
15	RxEIN1-	16	RxEIN1+
17	GND	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	GND
25	GND (AGMODE+HVS)	26	NC
27	GND	28	VCC
29	VCC	30	VCC

6.0 OPTICAL SPECIFICATION

Item		Symbol	Condition	Data	Unit	
Color chromaticity	Red	Rx	$\theta_x=0$ $\theta_y=0$ BM-7	0.640	-	
		Ry		0.347	-	
	Green	Gx		0.341	-	
		Gy		0.618	-	
	Blue	Bx		0.145	-	
		By		0.058	-	
	White	Wx		0.322	-	
		Wy		0.356	-	
Center Luminance of White		Lc		1600±10%	cd/m ²	
Average		La		1476	cd/m ²	
Uniform		Lu		77.7	%	
Contrast Ratio		CR	$\theta_x=0$ $\theta_y=0$ Klein K-10	1000	-	
Color Saturation		NTSC		76.5	%	
Viewing Angle	Horizontal	θ_x+		85	Deg	
		θ_x-		85		
	Vertical	θ_y+		80		
		θ_y-		80		

7.0 LED DRIVING BOARD SPECIFICATIONS

1. LED Application

This specification is applied to LED converter unit for SLD/SLO1768 (1600 nits) LED backlight

2. Operating Characteristics

Item	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	Remark
Input Voltage	Vin		10.0	12.0	14.0	V	
Input Current (Low Brightness)	IinL	VIN=12V,Vadj=5V	0.0	-----	-----	mA	
Input Current (High Brightness)	IinH	VIN=12V,Vadj=0V	2.14	2.42	2.43	A	
LED Current (Low Brightness)	IoutL	VIN=12V,Vadj=5V	0.0	-----	-----	Arms	
LED Current (High Brightness)	IoutH	VIN=12V,Vadj=0V	0.937	1.244	1.448	A	
Working Frequency	Freq	VIN=12V,Vadj=0V	120	125	130	KHZ	
PWM Frequency	Freq	VIN=12V	180	200	220	Hz	
Brightness Control	Vadj	Connection of Voltage	0.5	-----	4.8	V	
ON/OFF Control	Von/off	Normal Operation	2	-----	5	V	
Output Voltage	Vout	VIN=12V,Vadj=0V	21.215	21.831	22.198	V	
Efficiency	η	VIN=12V,Vadj=0V	92.89	93.52	94.48	%	Note 1

Note 1: Efficiency = [(IoutH * Vout) / (IinH * Vin)] * 100%, Tolerance ±0.5%

3. Connector Socket

3-1. Input Connector :J1(JST B8B-PH-K-S or Compatible)

:

PIN No	Symbol	Description
1	Vin	DC+12V
2	Vin	DC+12V
3	Vin	DC+12V
4	GND	Ground
5	GND	Ground
6	GND	Ground
7	Brightness	Brightness Control 5V~0V
8	Control	ON/OFF Control 0.8V(OFF) 2~5V(ON)

3-2 .Output Connector :J2,J3(JST S2B-EH or Compatible)

PIN NO	Symbol	Description
1	Output	LED High Voltage(+)
2	Output	LED Low Voltage (-)


4. Mechanical Characteristics

Dimension: 124mm*50mm*15mm

INPUT CONNECTOR

J1:

- PIN1:VIN
- PIN2:VIN
- PIN3:VIN
- PIN4:GND
- PIN5:GND
- PIN6GND
- PIN7:BRIGHTNESS
- PIN8:ON/OFF

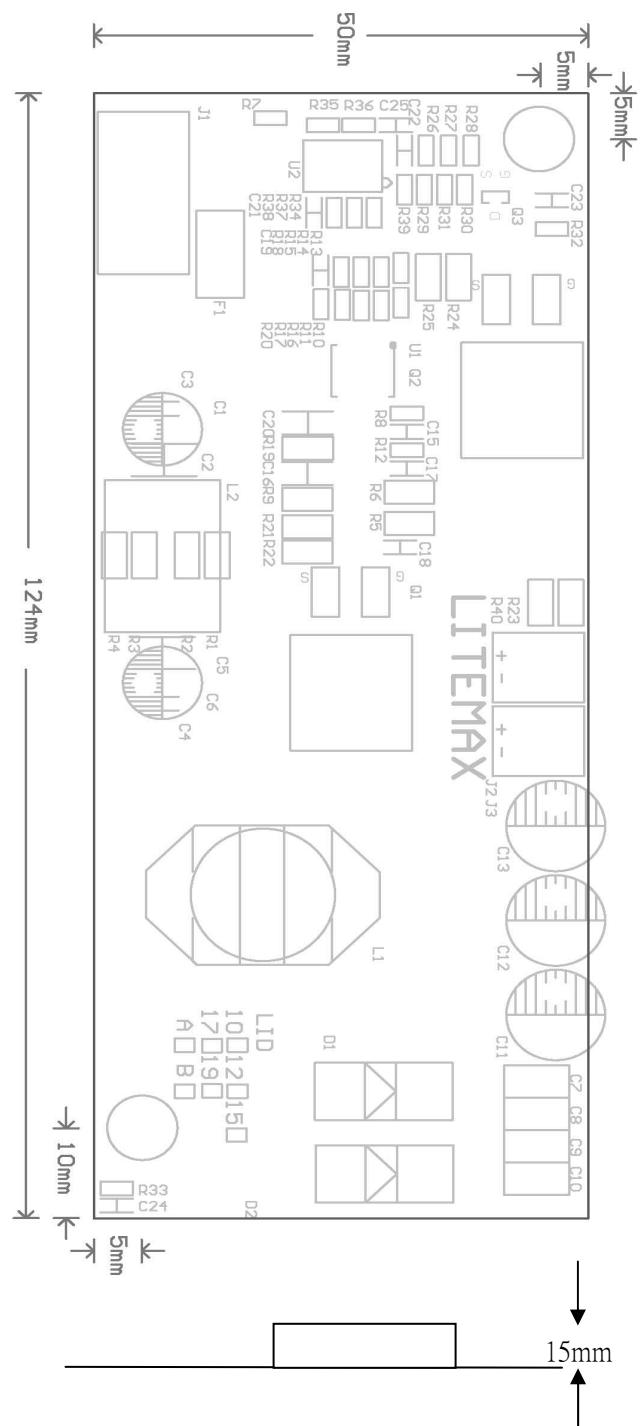

8.0 AD2662GDVAR SPECIFICATIONS


We developed this A/D board to support industrial high brightness and commercial applications. This A/D board has many functions. It has an external luminance sensor as an option, an optional VR button to control brightness, fan rotation and RS232. Rev.1 is European RoHS compliant.

8.1 General Description


- Max Resolution Up To WUXGA
- Analog RGB Input up to 205MHz
- ULTRA-RELIABLE DVI INPUT
- Dual/single LVDS interface
- Support Panel DC5V or 3.3V, 12V Output
- External Fan Control by Software
- OSD Control
- Inverter Analog or PWM Dimming Control
- *External V.R. brightness control (optional)
- *External light sensor brightness control (optional)
- *External RS232 control (optional)
- Input Power 12V DC
- CBVS, S-VIDEO, YCbCr (optional) INPUT
- Audio in and b2Wx2 Audio Out(optional)
- IR Remote control(optional)

8.2 Outline Dimensions

AD2662GD 150mmX100mmX20mm

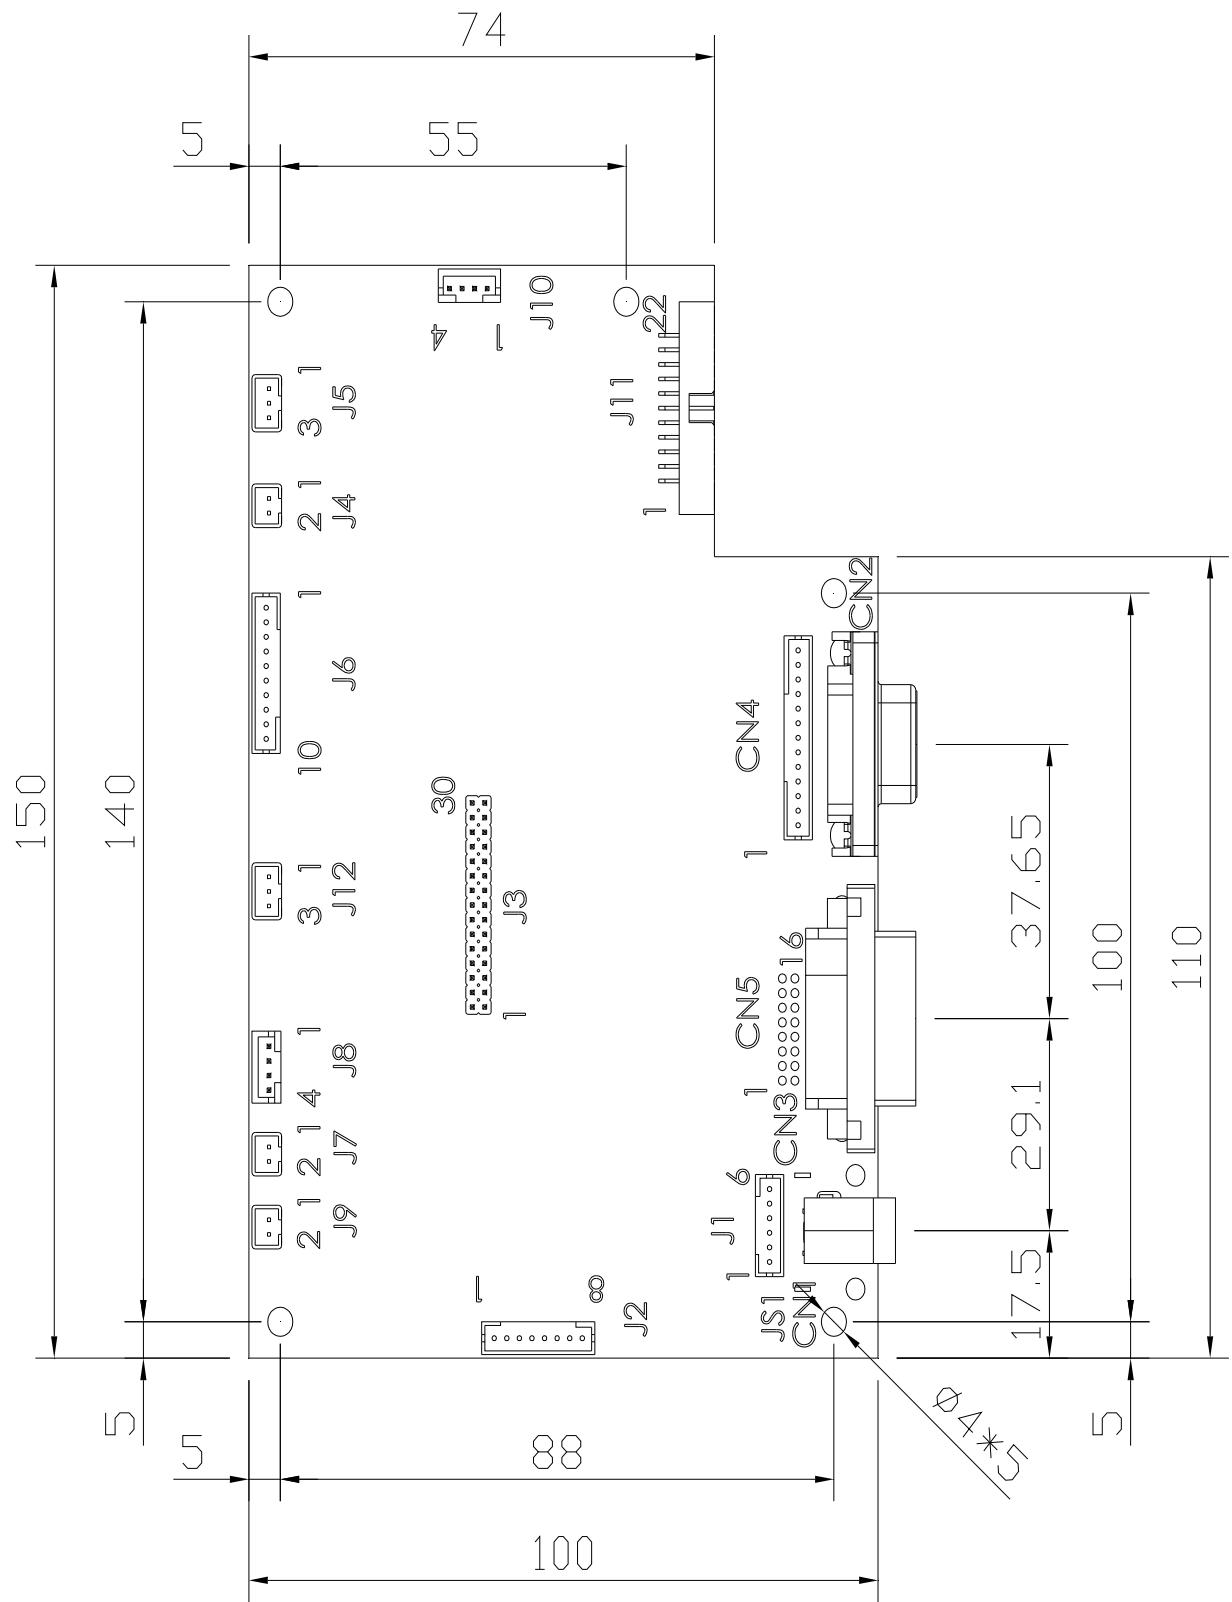


I/O BOARD 160mmX25mmX15mm

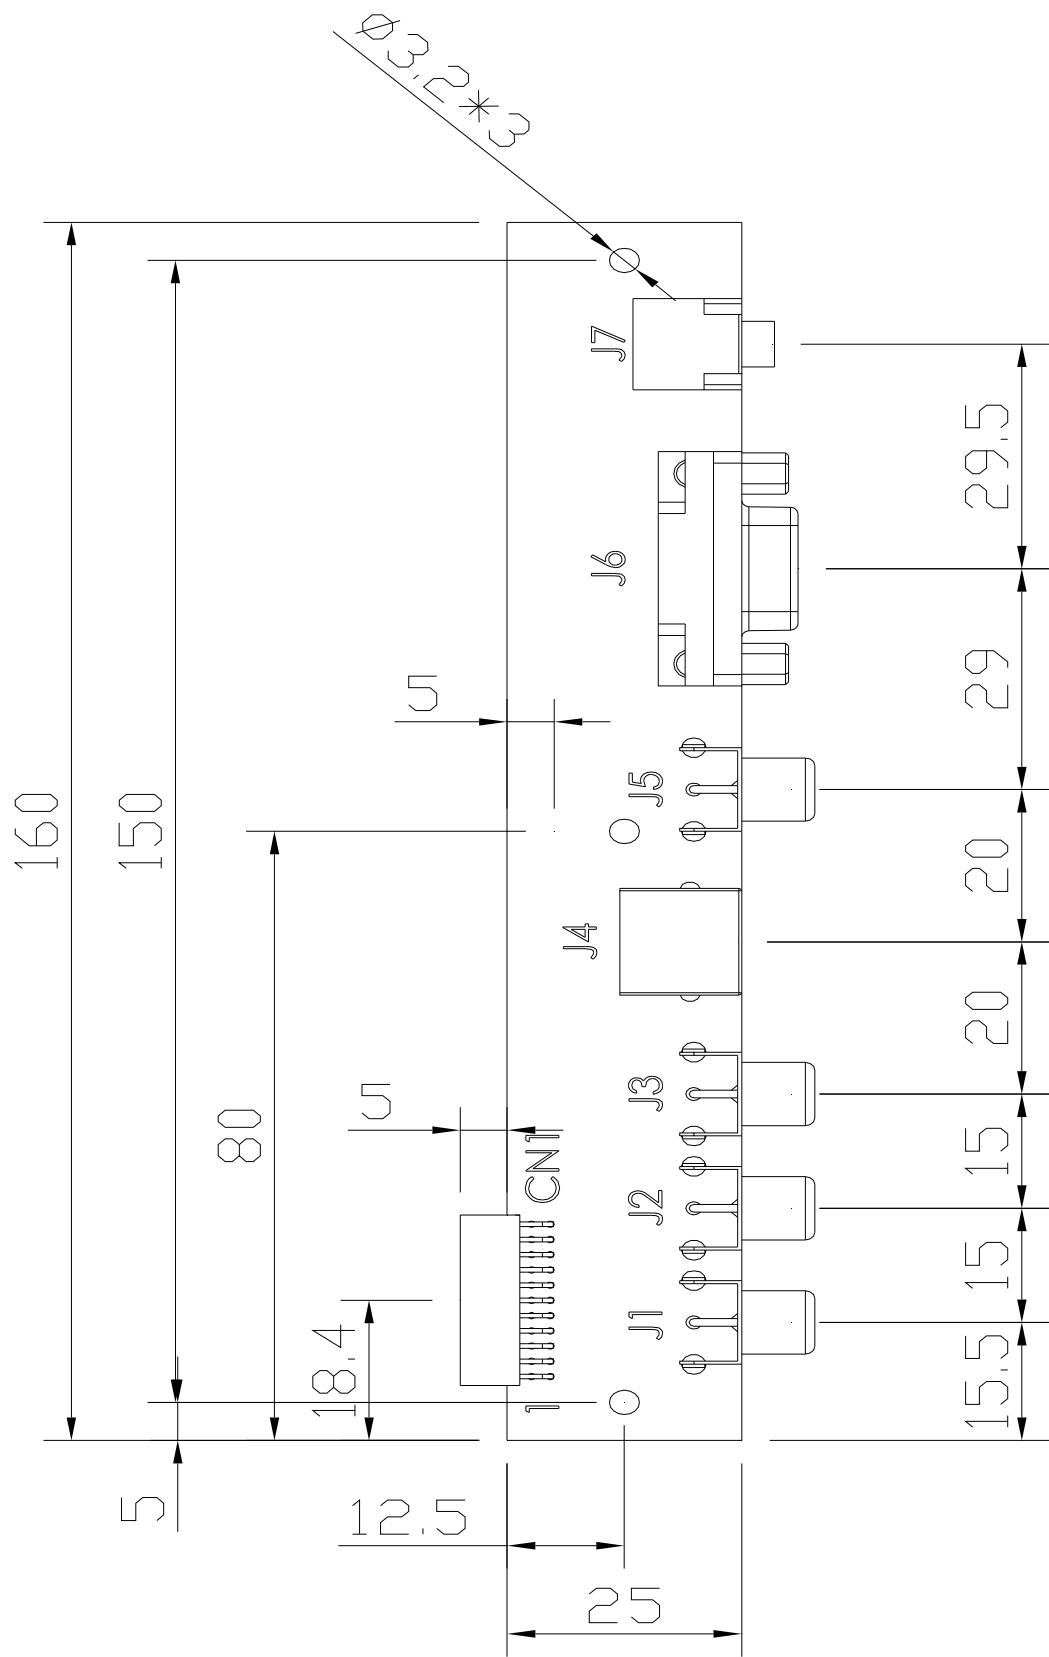

AD2662GDV

AR 272mmX100mmX20mm

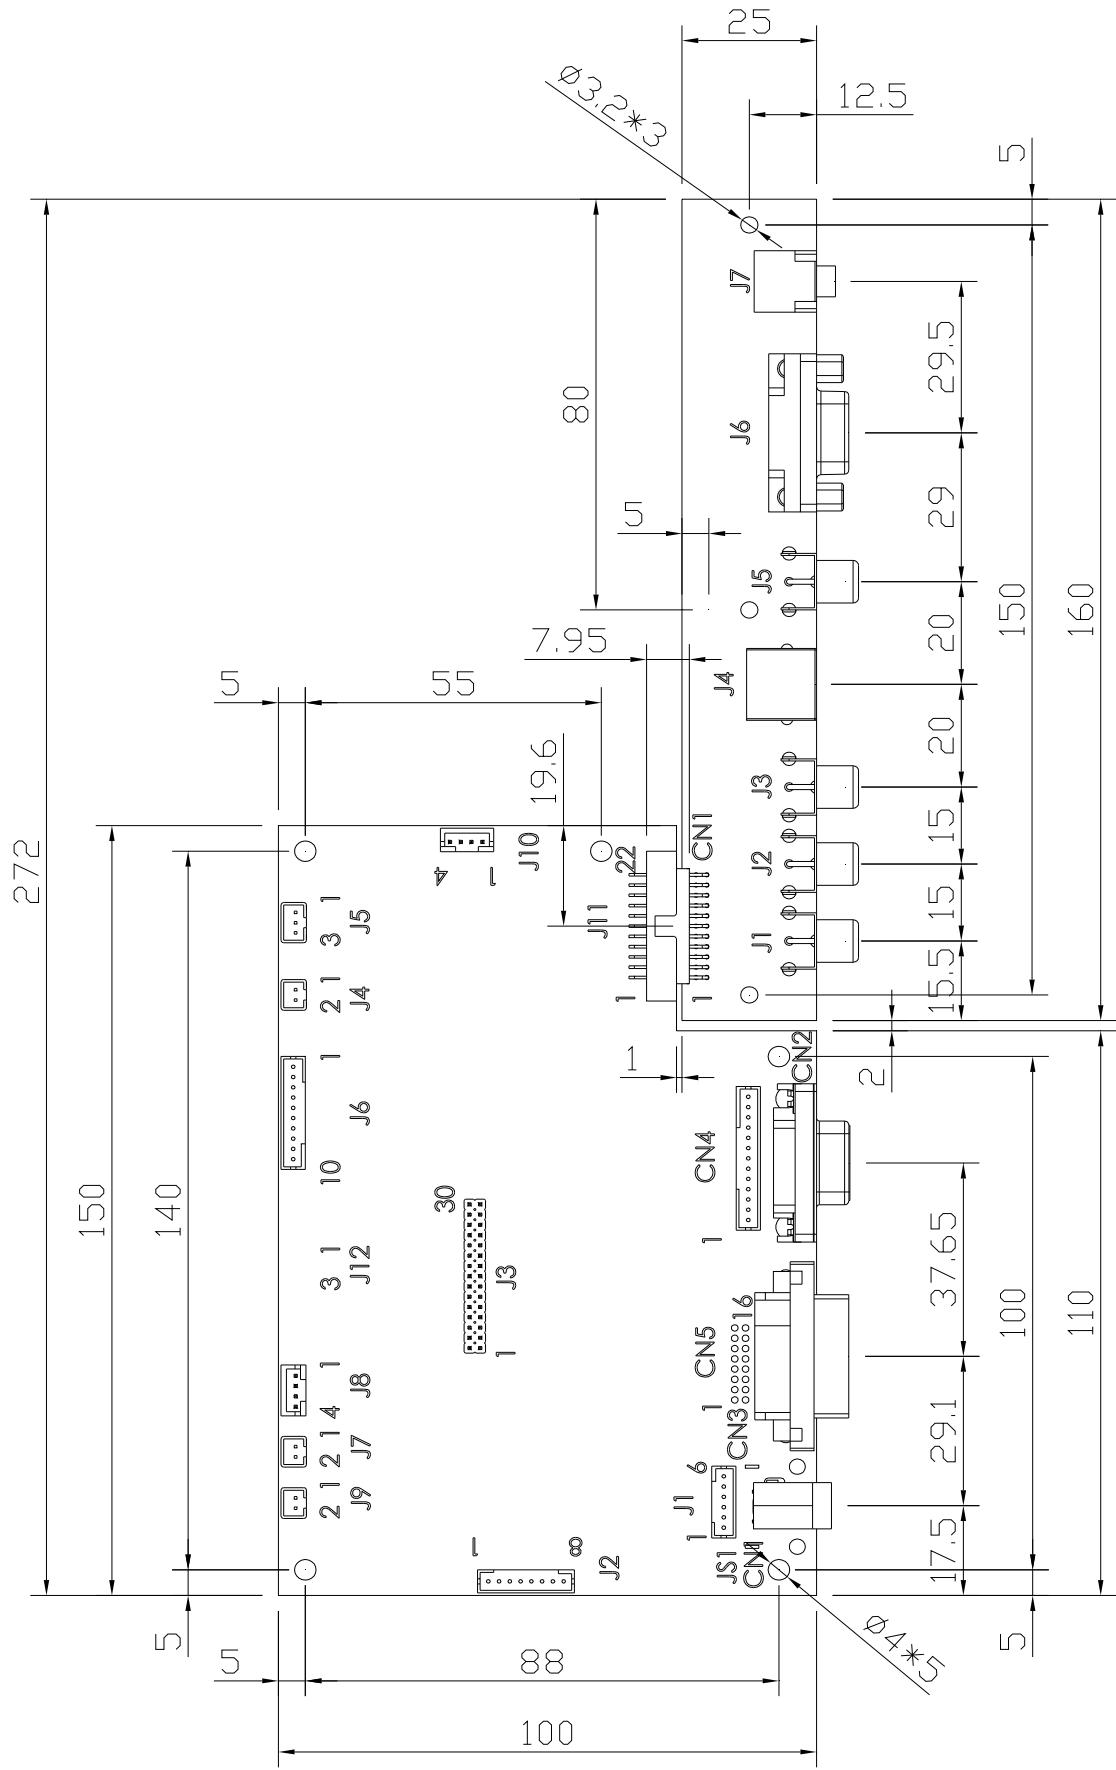

8.3 AD2662 Board Pin Define

J3: Panel connector

Pin No.	Function	Pin No.	Function
1	RxO0+	16	RxE1-
2	RxO0-	17	RxE2+
3	RxO1+	18	RxE2-
4	RxO1-	19	RxEC+
5	RxO2+	20	RxEC-
6	RxO2-	24	RxE3+
7	RxOC+	22	RxE3-
8	RxOC-	23	GND
9	RxO3+	24	GND
10	RxO3-	25	GND
11	GND	26	GND
12	GND	27	GND
13	RxE0+	28	PANEL-VCC
14	RxE0-	29	PANEL-VCC
15	RxE1+	30	PANEL-VCC

CN3: DVI-D INPUT Connector

Pin No.	Function	Pin No.	Function	Pin No.	Function
1	T.M.D.S. Data2-	9	T.M.D.S. Data1-	17	T.M.D.S. Data0-
2	T.M.D.S. Data2+	10	T.M.D.S. Data1+	18	T.M.D.S. Data0+
3	T.M.D.S. Data2/4 Shield	11	T.M.D.S Data1/3 Shield	19	T.M.D.S. Data0/5 Shield
4	T.M.D.S. Data4-	12	T.M.D.S. Data3-	20	T.M.D.S. Data5-
5	T.M.D.S. Data4+	13	T.M.D.S. Data3+	24	T.M.D.S. Data5+
6	DDC Clock	14	+5V Power	22	T.M.D.S. Clock Shield
7	DDC Data	15	Ground (for +5V)	23	T.M.D.S. Clock+
8	Not Connected	16	Hot Plug Detect	24	T.M.D.S. Clock-

CN5: DVI-D Connector (16pin 2.0mm)

Pin No.	Function	Pin No.	Function	Pin No.	Function
1	RX2-	7	DDC_SDA	13	GND
2	RX2+	8	DDC_SCL	14	GND
3	RX1-	9	GND	15	DVI HP
4	RX1+	10	GND	16	DVI_5V
5	RX0-	11	RXC-		
6	RX0+	12	RXC+		

CN2: Analog RGB Input connector (D-SUB 15Pin)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	RED	Analog Red	9	+5V	+5VDDC
2	GREEN	Analog Green	10	SGND	Sync GND
3	BLUE	Analog Blue	11	NCD	Reserved
4	GND	Reserved	12	SDA	DDC Serial Data
5	NC	VGA_CAB	13	H SYNC	Horizontal Sync
6	RED_RTN	Red Return	14	V SYNC	Vertical Sync
7	GREEN_RTN	Green Return	15	SCL	DDC Data Clock
8	BLUE_RTN	Blue Return			

CN4: Analog RGB Input connector (13pin connector)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	SCL	DDC Data Clock	8	BGND	Blue Return
2	SDA	DDC Serial Data	9	BLUE	Analog Blue
3	GND	Reserved	10	GGND	Green Return
4	+5V	+5VDDC	11	GREEN	Analog Green
5	GND	Reserved	12	RGND	Red Return
6	VSYNC	Vertical Sync	13	RED	Analog Red
7	H SYNC	Horizontal Sync			

JS1: Power DIN(12V)

Pin No.	Function	Pin No.	Function
1	12VDC	2	12VDC
3	GND	4	GND

JS1: Power Jack (12V)

Pin No.	Function	Pin No.	Function
1	12VDC	2	12VDC

J1: Power connector (12V) (6PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	12VDC	4	GND
2	12VDC	5	GND
3	12VDC	6	GND

J8: Power connector (5V/12v)(4PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	5VDC	2	GND
3	12VDC	4	GND

J2: Inverter Connector(8PIN 2.0mm)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	ON/OFF	Backlight ON/OFF	5	GND	GND
2	BRIGHT	Dimming adjust	6	12VDC	Input 12VDC
3	GND	GND	7	12VDC	Input 12VDC
4	GND	GND	8	12VDC	Input 12VDC

J7, J9: FAN (2PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	FAN(+)	2	GND

J6: Key Pad (9PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	POWER KEY	6	MENU KEY
2	GREEN LED	7	AUTO KEY
3	RED LED	8	GND
4	DOWN KEY	9	GND
5	UP KEY		

J10: Speaker Connector (4PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	SPK-R	2	GND
3	GND	4	SPK-L

J11 Extern Funtion Connector (11P X 2PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	Pb	2	Y
3	GND	4	Pr
5	GND	6	SY
7	GND	8	SC
9	GND	10	AV
11	GND	12	GND
13	TXD	14	RXD
15	GND	16	GND
17	GND	18	GND
19	Audio-L	20	Audio-R
24	GND	22	GND

J5: Ambient (3PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	3.3VDC	2	Sensor Out

J4: VR connector (3PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	3,3VDC	2	VR Out
3	GND		

J12: IR Connector(3PIN 2.0mm)

Pin No.	Function	Pin No.	Function
1	IR Out	3	3.3VDC
2	GND	4	

JP1: PANEL VCC (3PIN 2.54mm)

Pin No.	Function	Pin No.	Function
1-2	12V	5-6	3.3V
3-4	5V		

8.4 I/O BOARD Pin Define

J1:Component Y

Pin No.	Function	Pin No.	Function
1	Y	2	GND

J2:Component Cb

Pin No.	Function	Pin No.	Function
1	Cb	2	GND

J3:Component Cr

Pin No.	Function	Pin No.	Function
1	Cr	2	GND

J4:S-Video

Pin No.	Function	Pin No.	Function
1	GND	2	GND
3	Luminance	4	Chrominance

J5:Composite

Pin No.	Function	Pin No.	Function
1	Y	2	GND

J6:D-SUB9(RS232)

Pin No.	Function	Pin No.	Function
1	NC	2	TXD
3	RXD	4	NC
5	GND	6	NC
7	NC	8	NC
9	NC		

CN1:11P X 2 Connector

Pin No.	Function	Pin No.	Function
1	Component Cb	2	Component Y
3	GND	4	Component Cr
5	GND	6	S-Video Y
7	GND	8	S-Video C
9	GND	10	Composite
11	GND	12	GND
13	TXD	14	RXD
15	GND	16	GND
17	GND	18	GND
19	Audio IN(L)	20	Audio IN(R)

8.5 IR Receive Board Pin Define

J1: IR Connector

Pin No.	Function	Pin No.	Function
1	DATA OUT	2	GND
3	VCC	4	NC

8.6 DC Characteristics.

Power Consumption	10W	Note1
Operation Temperature	0~70	°C
Storage Temperature	-20~85	°C

Note: These values are for the A/D board body.

8.7 OSD menu

Here are some instructions for you to use the OSD (On Screen Display). By pressing the “menu”, you will see the below picture.

Timing shows resolution, H-frequency, and V-frequency of the panel. Version shows the firmware control version. This 2 information is not changeable by user.



There are 7 sub pages inside the OSD manual, Brightness, Signal select, Sound, Color, Image, Tools, and Exit.

When you press “menu” button, you enter the “Brightness” sub page.

You will see 5 selections:



press ‘’menu’’



Light press ‘’menu’’



VR press ‘’menu’’



OSD Brightness:



press ‘’right’’ key



press ‘’menu’’ once, you can go into adjust the brightness. Press ‘’left’’ you can dim down the brightness to ‘’0’’, while press ‘’right’’ you can increase the brightness to ‘’100’’.



Ambient light sensor: press this Icon, must to accompany with Litemax ambient light sensor to auto dimming.(OPTION)



Potentiometer: press this icon, adjust VR function.(OPTION)



Ambient light sensor with OSD offset: press this Icon



Press ‘’menu’’ once, you can adjust min. luminance to fit your application (OPTION)




Contrast: Press ‘’menu’’ and ‘’right’’ you can adjust the contrast from ‘’0’’ to ‘’100’’ by pressing the ‘’left’’ and ‘’right’’.



Exit: You can exit this sub menu back to normal screen.

Sound :

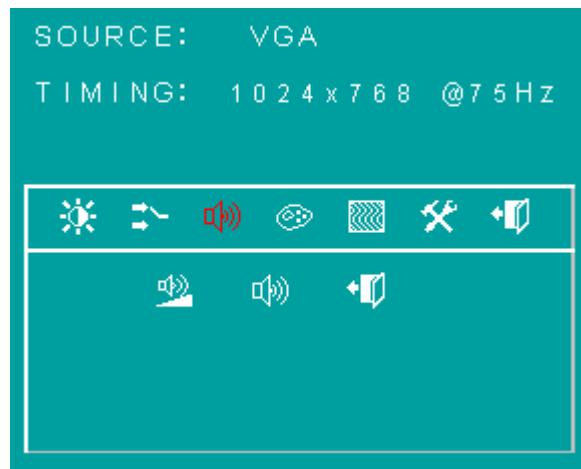

There are 3 options for “Sound” sub page.



Audio Volume: Audio volume adjustment.



Mute: You can mute the speaker by pressing this option.



Exit: back to the normal screen.



Auto Color: by press this “Auto Color” option, you can get the optimal color performance.



SRGB: Windows standard color setting.



Color Tempture: You can have 3 options in this selection.



Color Tempture User



Color Tempture_6500K



Color Tempture_9300K


“user mode”, “6500K” (Warm color scheme), “9300K (Cold color scheme).
Default is “user”, and inside all “R”, “G”, and “B” are set “100”



Exit: back to the normal screen.

Image :

Go into the “Image” page, you can see below picture.

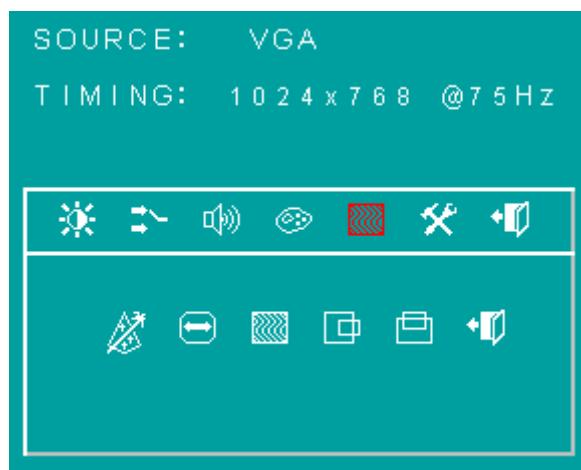



Auto just: Pressing this option, the AD2662 will adjust the optimal frequency of horizontal and vertical. You will see “Auto tune....” On the screen for around 3 seconds.



Clock: If you are not satisfied about the Autotune result, you can adjust manually by “Clock”.

The screen will be “wider” if you adjust this function.



Phase: If you see “double image” on characters, you can adjust “Phase” to make it perfect image.



HPos: You can shift the screen horizontally by this function.



Vpos: You can shift the screen vertically by this function.



Exit: Back to normal screen.

TOOLS :

On the “Tools” sub menu, you will see 4 icons.



Osd Control: Select this option, you will see 4 more options:



	Osd_time: You can selection the time of OSD from 2 sec. to 16 sec.	D
	Osd_HPos: You can move the OSD horizontally over the screen.	
	Osd_VPos: You can move the OSD Vertically over the screen.	
	Exit: back to main menu.	
	Factory_Reset: By pressing this, the screen will be back to the factory setting on very beginning and lost all the personal settings.	
	Sharpness: You can make the characters looks sharper.	
	Exit	

BURNIN MODE :

Factory Burn-in mode: While your VGA cable is connected on the monitor, press “Menu” and Left and Right <” simultaneously, you will see “BURN IN MODE” on the center of the screen for 3 sec. Then unplug the VGA cable, the screen will show Red, Green, Blue, White, and Black in sequence automatically.

You can plug in the VGA signal cable, and re-plug the power connector to exit the burn-in mode.

KEY LOCK MODE :

OSD Lock Function: It is possible to lock all the OSD buttons to prevent unauthorized changes to occur by pressing “Menu” and “right >” buttons simultaneously. You will see the “lock” icon below on the center of the screen for 3 seconds. If any button is pushed after the lock function is initiated, the below icon will appear on the screen.'





To release the OSD lock, press “Menu” and “Right >”. The below icon will appear on the center of the screen for 3 seconds. Now all OSD keys are active again.



9.0 MECHANICAL DRAWING

SLD1768

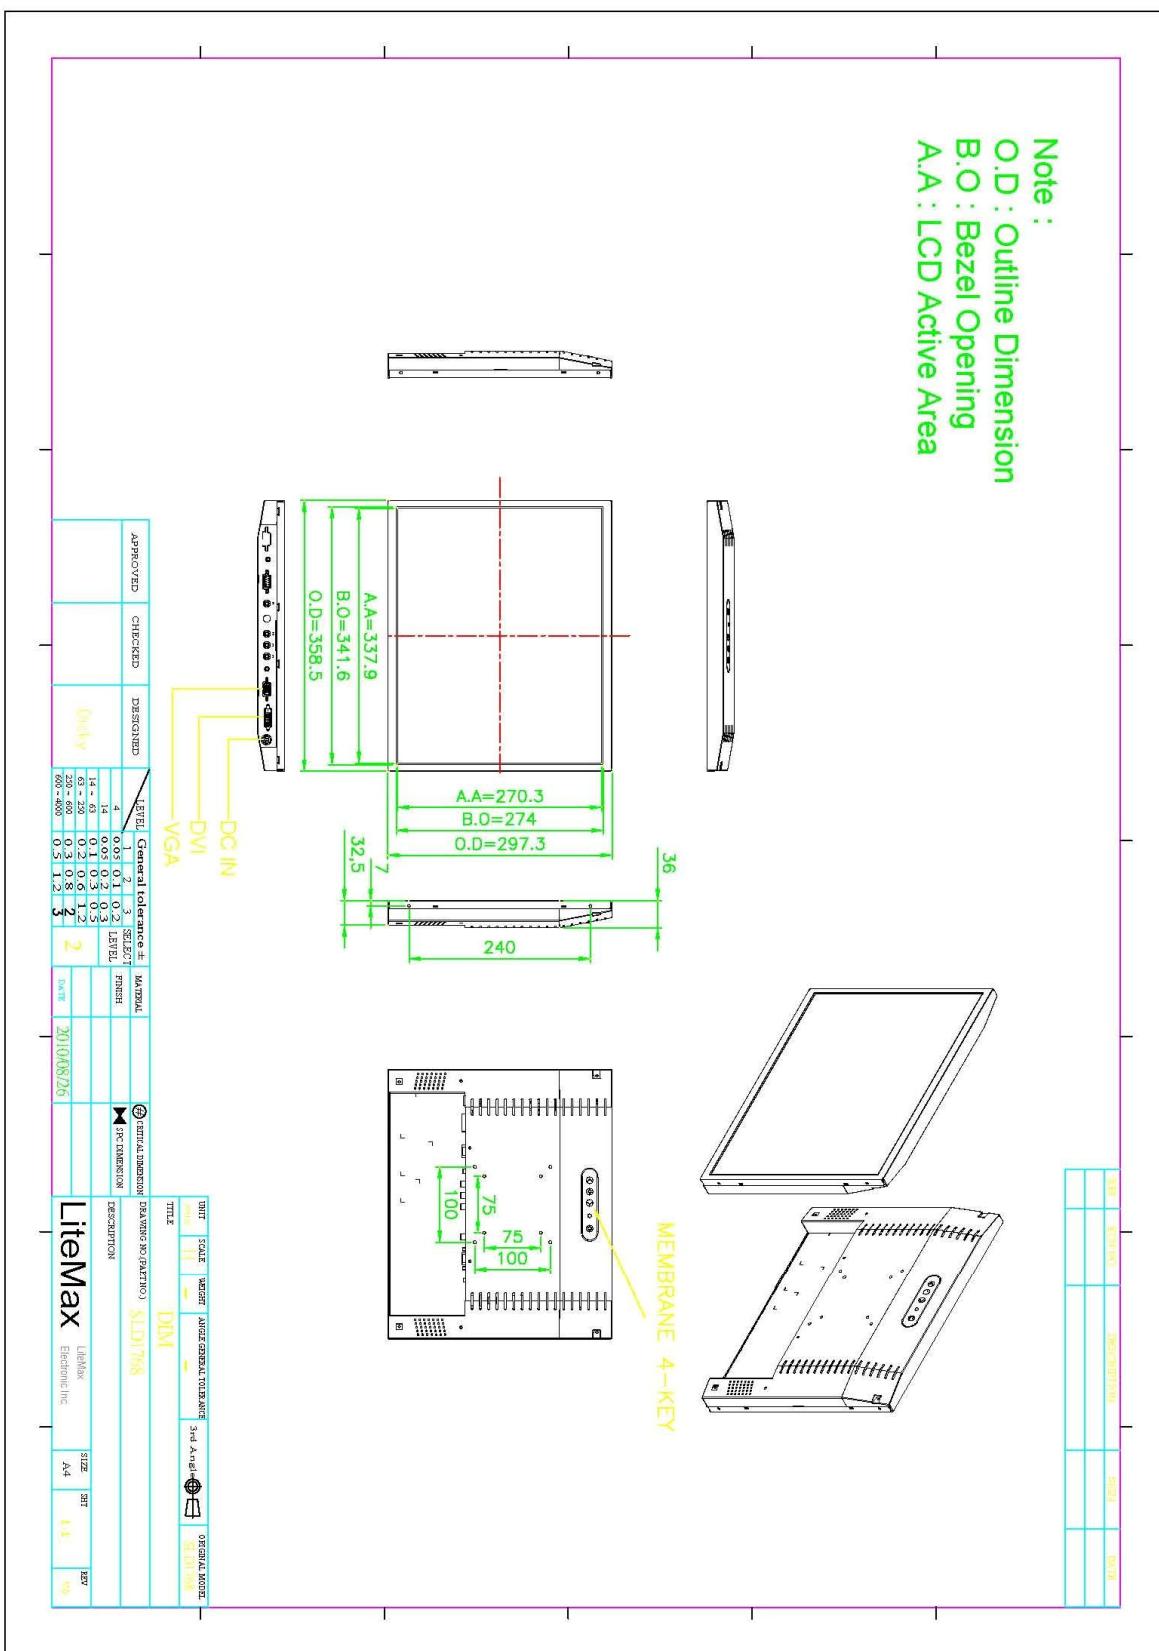

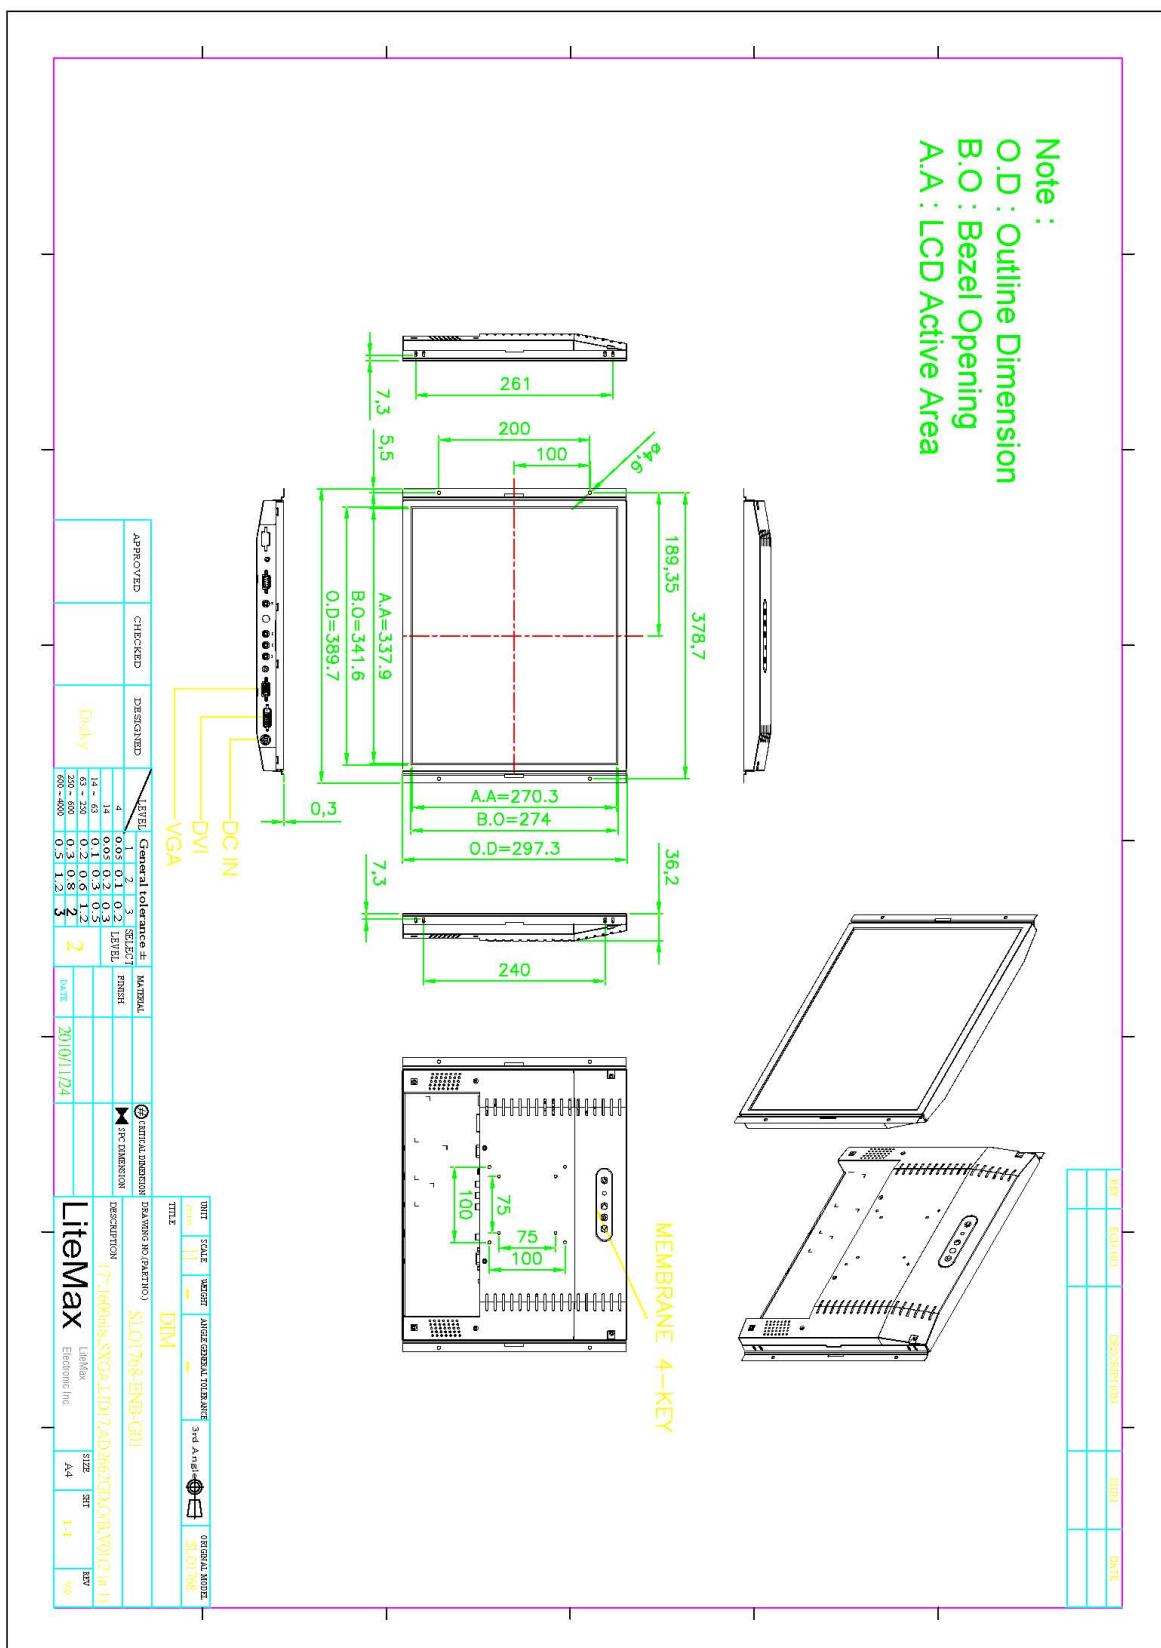

10.0 PRECAUTIONS

HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the lamp wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

STORAGE PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.