



SSC2925 (Double Side LCD Display)

Two 29.3" Resizing LCD, 1000 nits LED backlight, 1366x512 ultra wide aspect ratio 16:6

SSC2925 is an innovative ultra-wide, sunlight readable, slim, LED backlight Double Side LCD display. it provides LCD panel with specific ratios for digital signage, public transportation, exhibition hall, department store, vending machine and industrial applications. Incorporating with A.D. control board and backlight design, it is high brightness and sunlight readable panel, can display high-quality video with energy-efficient.

Key Features

- Resizing LCD
- Double Side LCD Display
- Ultra Wide Screen (16 : 6)
- Sunlight Readable
- LED Backlight
- High Brightness 1000 nits
- High Uniformity (90%)
- Wide Dimming
- Life Expectancy (70,000hrs)
- Portrait / Landscape Mode (Optional)
- Slim Bezel
- Thickness: 37mm

Applications

Digital Signage, Vending Machine, Department Store, Transportation



Specifications

Preliminary

Model No.	SSC2925
Description	Two 29.3" Resizing LCD, 1000 nits LED backlight, 1366x512
Display Area	697.68 x 261.5 mm
Brightness	1,000 cd/m ²
Resolution	1366 x 512
Aspect Ratio	16 : 6
Contrast Ratio	2500:1
Pixel Pitch (mm)	0.51075 x 0.51075
Viewing Angle	176°(H), 176°(V)
Display Colors	16.7M
Response Time (Typical)	6.5 ms
Sync	LVDS
Power Consumption	108W
Dimensions (mm)	760 x 318 x 37
Weight (Net)	17 Kg
LED Driving Board	LID29A
Control Board (Optional)	AD2662GDHMA
☐ AD2662GDHMA	VGA + DVI + HDMI + Audio
F / R Control Button	4 Key
☐ 4 Key	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	☐ Touch Screen

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.

SSC= Panel+ LED Driving Board + Control Board



Mechanical Drawing

Outline Dimensions

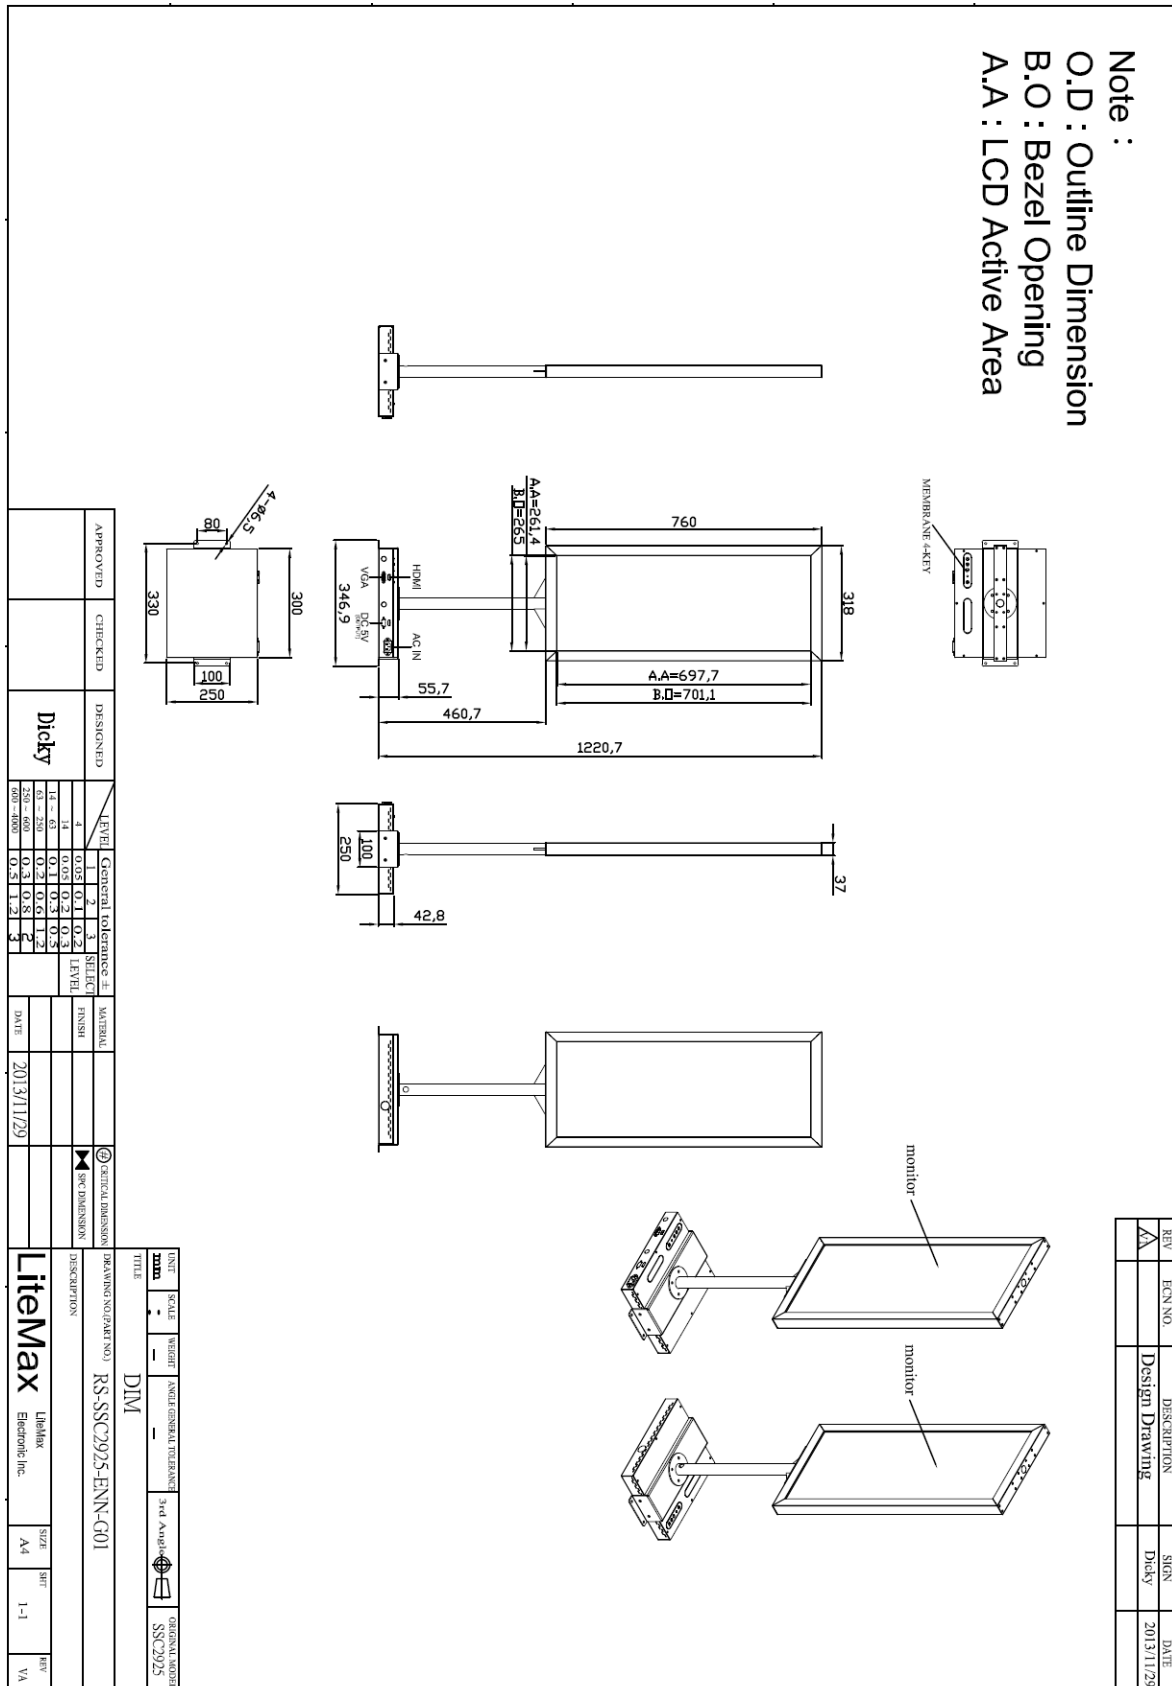



Portrait Mode



Landscape Mode



Ordering Information

Model Name	Description
SSC2925-ENN-G01	29.3" *2,1000nits,1366*512,LID29,AD2662GDHMA,speaker*2,OSD,AC100~240V input,V1

Optional Accessories

Part Number	Description
810618301010 (Optional)	CABLE.POWER.AC.1830mm.(US Type).3PIN PLUG TO SOCKET.SVT(SPT-2)18AWG 3C BLACK,P.
810618301090 (Optional)	CABLE,POWER,AC,1830mm.(EU Type) 3PIN PLUG TO.SOCKET,H05VV-F 3G.0.75MMSQ BLACK,P
810618301050 (Optional)	CABLE,POWER,AC,1830mm.UK(FUSE) 3PIN PLUG TO.SOCKET,H05VV-F 3C(3G) 0.75MMSQ BLACK,P
810618301170 (Optional)	CABLE.POWER,AC,1830mm. (AU Type) 3PIN PLUG TO 2P SOCKET.LTSA 0.75MMSQ BLACK,P
810618301030 (Optional)	CABLE.POWER.AC.1830mm.(JP Type).2PIN PLUG Y TERMINAL TO. SOCKET.VCTF 3C 0.75MMSQ BLACK,P